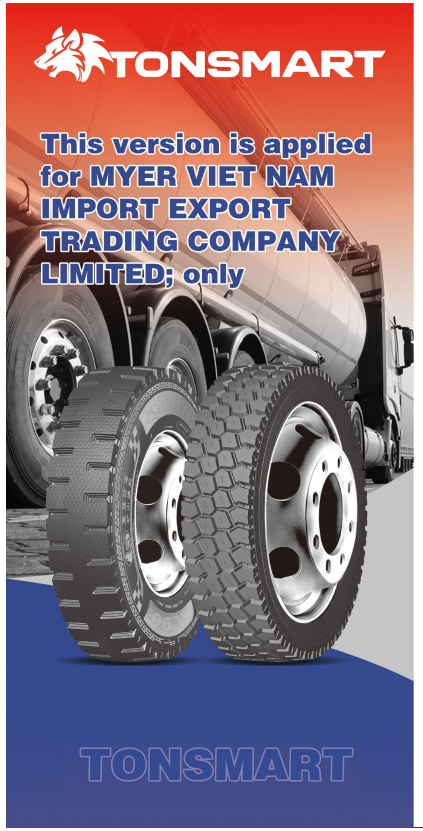

GL50

Suitable for only semi-trailer for paved/mixed road of long-haul distance

Pattern	Size	PR	LI & SS	Overall Diameter (mm)	Load Capacity(kg) Single	Load Capacity(kg) Dual	Inflation Pressure (kpa)	Section Width (mm)	Standard Rim (inch)	Tread Depth (mm)
GL50	295/80R22.5	18	152/148M	1044	3550	3150	980	298	9.00	16

*This product cannot be used for lorries truck and buses.

GL51PLUS

Suitable for only semi-trailer for paved/mixed road of long-haul distance

Pattern	Size	PR	LI & SS	Overall Diameter (mm)	Load Capacity(kg) Single	Load Capacity(kg) Dual	Inflation Pressure (kpa)	Section Width (mm)	Standard Rim (inch)	Tread Depth (mm)
GL51PLUS	275/80R22.5	16	149/146L	1012	3250	3000	900	276	8.25	16
	12R22.5	18	152/149L	1085	3550	3250	930	300	9.00	17.2

*This product cannot be used for lorries truck and buses.

GL12(ECO)

Suitable for only semi-trailer for paved/mixed road of long-haul distance

Pattern	Size	PR	LI & SS	Overall Diameter (mm)	Load Capacity(kg) Single	Load Capacity(kg) Dual	Inflation Pressure (kpa)	Section Width (mm)	Standard Rim (inch)	Tread Depth (mm)
GL12(ECO)	12R22.5	18	152/149K	1085	3550	3250	930	300	9.00	14

*This product cannot be used for lorries truck and buses.

GL13(ECO)

Suitable for only semi-trailer for paved/mixed road of long-haul distance

Pattern	Size	PR	LI & SS	Overall Diameter (mm)	Load Capacity(kg) Single	Load Capacity(kg) Dual	Inflation Pressure (kpa)	Section Width (mm)	Standard Rim (inch)	Tread Depth (mm)
GL13(ECO)	12R22.5	18	152/149L	1085	3550	3250	930	300	9.00	14

*This product cannot be used for lorries truck and buses.

GL18

Suitable for only semi-trailer for paved/mixed road of long-haul distance

Pattern	Size	PR	LI & SS	Overall Diameter (mm)	Load Capacity(kg) Single	Load Capacity(kg) Dual	Inflation Pressure (kpa)	Section Width (mm)	Standard Rim (inch)	Tread Depth (mm)
GL18	12R22.5	18	152/149L	1085	3550	3250	930	300	9.00	17.2

*This product cannot be used for lorries truck and buses.

GL16

Suitable for only semi-trailer for paved/mixed road of long-haul distance

Pattern	Size	PR	LI & SS	Overall Diameter (mm)	Load Capacity(kg) Single	Load Capacity(kg) Dual	Inflation Pressure (kpa)	Section Width (mm)	Standard Rim (inch)	Tread Depth (mm)
GL16	12R22.5	18	152/149L	1085	3550	3250	930	300	9.00	16.5

*This product cannot be used for lorries truck and buses.

GL56

Suitable for only semi-trailer for paved/mixed road of long-haul distance

Pattern	Size	PR	LI & SS	Overall Diameter (mm)	Load Capacity(kg) Single	Load Capacity(kg) Dual	Inflation Pressure (kpa)	Section Width (mm)	Standard Rim (inch)	Tread Depth (mm)
GL56	11R22.5	18	149/146M	1054	3250	3000	930	279	8.25	15.5
	11R24.5	16	148/145L	1106	3250	3000	830	279	8.25	15.5
	295/75R22.5	16	146/143L	1015	3000	2750	830	293	9.00	14.5
	295/75R22.5	18	148/145L	1015	3150	2900	900	293	9.00	14.5
	295/80R22.5	18	149/146M	1044	3550	3250	900	298	9.00	18
	315/70R22.5	20	156/150L	1014	4000	3350	930	312	9.00	15.5
	315/80R22.5	20	157/154M	1076	4125	3750	900	312	9.00	17
	315/80R22.5	22	160/157M	1087	4500	4125	970	312	9.00	17
	385/65R22.5	20	160K	1072	4500	4125	900	389	11.75	16
	215/75R17.5	16	127/124L	767	1750	1600	830	211	6.00	14
	225/60R17.5	14	129/127L	865	1850	1750	760	226	6.75	15
	235/75R17.5	16	132/129L	797	2000	1850	830	233	6.75	15
	245/70R17.5	18	136/133L	789	2120	2000	900	248	7.50	15
	245/70R19.5	16	135/133L	839	2180	2060	830	248	7.50	16
	265/70R19.5	16	139/136L	867	2430	2240	830	262	7.50	16
	6.50R16LT	12	112/114L	750	1060	925	670	185	5.50F	11.5
	7.00R16LT	14	118/114L	775	1320	1180	770	200	6.00G	13
	7.50R16LT	14	121/116L	865	1650	1450	870	215	6.00G	13.5
	8.25R16LT	18	132/128L	855	2000	1800	870	235	6.50H	15

*This product cannot be used for lorries truck and buses.

GL57

Suitable for only semi-trailer for paved/mixed road of long-haul distance

Pattern	Size	PR	LI & SS	Overall Diameter (mm)	Load Capacity(kg) Single	Load Capacity(kg) Dual	Inflation Pressure (kpa)	Section Width (mm)	Standard Rim (inch)	Tread Depth (mm)
GL57	305/85R22.5	20	160K	1072	4500		900	389	11.75	16.5
	305/85R22.5	24	164E	1072	8000		900	389	11.75	16.5

*This product cannot be used for lorries truck and buses.

GL60

Suitable for only semi-trailer for paved/mixed road of long-haul distance

Pattern	Size	PR	LI & SS	Overall Diameter (mm)	Load Capacity(kg) Single	Load Capacity(kg) Dual	Inflation Pressure (kpa)	Section Width (mm)	Standard Rim (inch)	Tread Depth (mm)
GL60	295/80R22.5	18	152/149L	1044 1050	3550	3150	900 930	225 298	9.00	15

*This product cannot be used for lorries truck and buses.

GL59

Suitable for only semi-trailer for paved/mixed road of long-haul distance

Pattern	Size	PR	LI & SS	Overall Diameter (mm)	Load Capacity(kg) Single	Load Capacity(kg) Dual	Inflation Pressure (kpa)	Section Width (mm)	Standard Rim (inch)	Tread Depth (mm)
GL59	12R22.5	18	152/149L	1085	3550	3250	930	300	9.00	18
	275/80R22.5	18	149/146L	1012	3250	3000	900	276	8.25	16.5
	295/80R22.5	18	152/149L	1044	3550	3250	900	298	9.00	16.5

*This product cannot be used for lorries truck and buses.

GL70

Suitable for only semi-trailer for paved/mixed road of long-haul distance

Pattern	Size	PR	LI & SS	Overall Diameter (mm)	Load Capacity(kg) Single	Load Capacity(kg) Dual	Inflation Pressure (kpa)	Section Width (mm)	Standard Rim (inch)	Tread Depth (mm)
GL70	295/80R22.5	18	152/149M	1044	3550	3150	900	298	9.00	18.5

*This product cannot be used for lorries truck and buses.

GL72

Suitable for only semi-trailer for paved/mixed road of long-haul distance

Pattern	Size	PR	LI & SS	Overall Diameter (mm)	Load Capacity(kg) Single	Load Capacity(kg) Dual	Inflation Pressure (kpa)	Section Width (mm)	Standard Rim (inch)	Tread Depth (mm)
GL72	11R22.5	16	146/143M	1054	3000	2715	830	279	8.25	20
	12R22.5	18	149/146M	1054	3250	3000	930	279	8.25	20
	315/80R22.5	20	157/154M	1082	4125	3750	990	312	9.00	19.5

*This product cannot be used for lorries truck and buses.

GT11

Suitable for only semi-trailer for paved/mixed road of long-haul distance

Pattern	Size	PR	LI & SS	Overall Diameter (mm)	Load Capacity(kg) Single	Load Capacity(kg) Dual	Inflation Pressure (kpa)	Section Width (mm)	Standard Rim (inch)	Tread Depth (mm)
GT11	12R22.5	18	152/149L	1085	3550	3250	930	300	9.00	21.5

*This product cannot be used for lorries truck and buses.

GL79

Suitable for only semi-trailer for paved/mixed road of long-haul distance

Pattern	Size	PR	LI & SS	Overall Diameter (mm)	Load Capacity(kg) Single	Load Capacity(kg) Dual	Inflation Pressure (kpa)	Section Width (mm)	Standard Rim (inch)	Tread Depth (mm)
GL79	215/75R17.5	16	127/124L	767	1750	1600	830	211	6.00	17.5
	295/80R22.5	18	152/149M	1044	3550	3250	930	298	9.00	22.5
	315/80R22.5	20	157/154M	1082	4125	3750	980	312	9.00	22.5
	315/80R22.5	22	160/157M	1087	4500	4125	970	312	9.00	23.9

*This product cannot be used for lorries truck and buses.

GL19

Suitable for only semi-trailer for paved/ mixed roadof mid-short distance

Pattern	Size	PR	LI & SS	Overall Diameter (mm)	Load Capacity(kg) Single	Load Capacity(kg) Dual	Inflation Pressure (kpa)	Section Width (mm)	Standard Rim (inch)	Tread Depth (mm)
GL19	12R22.5	18	152/149L	1085	3550	3250	930	300	9.00	19

*This product cannot be used for lorries truck and buses.

GL77

Suitable for only semi-trailer for paved/ mixed roadof mid-short distance

Pattern	Size	PR	LI & SS	Overall Diameter (mm)	Load Capacity(kg) Single	Load Capacity(kg) Dual	Inflation Pressure (kpa)	Section Width (mm)	Standard Rim (inch)	Tread Depth (mm)
GL77	12R22.5	18	152/149M	1085	3550	3250	930	300	9.00	24.5
	295/80R22.5	18	152/149M	1068	3550	3250	930	298	9.00	21
	315/70R22.5	20	156/150J K	1014	4000	3350	930	270	9.00	21

*This product cannot be used for lorries truck and buses.

GL76

Suitable for only semi-trailer for paved/ mixed roadof mid-short distance

Pattern	Size	PR	LI & SS	Overall Diameter (mm)	Load Capacity(kg) Single	Load Capacity(kg) Dual	Inflation Pressure (kpa)	Section Width (mm)	Standard Rim (inch)	Tread Depth (mm)
GL76	12R22.5	18	152/149K	1085	3550	3250	930	300	9.00	22.5

*This product cannot be used for lorries truck and buses.

SNW78

Suitable for only semi-trailer for paved/ mixed roadof mid-short distance

Pattern	Size	PR	LI & SS	Overall Diameter (mm)	Load Capacity(kg) Single	Load Capacity(kg) Dual	Inflation Pressure (kpa)	Section Width (mm)	Standard Rim (inch)	Tread Depth (mm)
SNW78	11R22.5	18	146/143L	1055	2750	3000	830	279	8.25	21
	11R24.5	16	149/146L	1110	3250	3000	830	279	8.25	21

*This product cannot be used for lorries truck and buses.

GL101

Suitable for only semi-trailer for paved/mixed road of long-haul distance

Pattern	Size	PR	LI & SS	Overall Diameter (mm)	Load Capacity(kg) Single	Load Capacity(kg) Dual	Inflation Pressure (kpa)	Section Width (mm)	Standard Rim (inch)	Tread Depth (mm)
GL101	315/80R22.5	20	157/154M	1080	4125	3750	900	312	9.00	15.5

*This product cannot be used for lorries truck and buses.

GL68

Suitable for only semi-trailer for paved/mixed road of long-haul distance

Pattern	Size	PR	LI & SS	Overall Diameter (mm)	Load Capacity(kg) Single	Load Capacity(kg) Dual	Inflation Pressure (kpa)	Section Width (mm)	Standard Rim (inch)	Tread Depth (mm)
GL68	6.50R16LT	12	110/106L	758	1060	925	670	185	5.50F	11
	7.00R16LT	14	118/114L	775	1320	1180	770	200	5.50F	11.5
	7.50R16LT	16	125/121L	805	1650	1450	870	215	6.00G	13
	8.25R16LT	18	132/128L	855	2000	1800	870	235	6.50H	14.5
	11.00R20	18	152/149M	1085	3550	3250	930	283	8.00	15
	12.00R20	20	156/153K	1125	4500	3850	980	315	8.5	15
	11R22.5	18	148/145M	1054	3250	3000	930	279	8.25	15

*This product cannot be used for lorries truck and buses.

GL67

Suitable for only semi-trailer for paved/mixed road of long-haul distance

Pattern	Size	PR	LI & SS	Overall Diameter (mm)	Load Capacity(kg) Single	Load Capacity(kg) Dual	Inflation Pressure (kpa)	Section Width (mm)	Standard Rim (inch)	Tread Depth (mm)
GL67	275/80R22.5	18	149/146K	1012	3250	3000	900	276	8.25	16.5
	7.50R16LT	16	125/121L	805	1650	1450	870	215	6.00G	13.5
	7.00R16LT	14	118/114L	775	1320	1180	770	200	6.00G	12.5
	8.25R16LT	18	132/128	855	2000	1800	870	235	6.50H	15
	12R22.5	18	152/149L	1085	3550	3250	930	300	9.00	17.7

*This product cannot be used for lorries truck and buses.

TONSMART

GL66

Suitable for only semi-trailer for paved/ mixed roadof mid-short distance

Pattern	Size	PR	LI & SS	Overall Diameter (mm)	Load Capacity(kg) Single	Load Capacity(kg) Dual	Inflation Pressure (kpa)	Section Width (mm)	Standard Rim (inch)	Tread Depth (mm)
GL66	295/80R22.5	18	152/149K	1050	3550	3250	930	298	9.00	16
	315/80R22.5	20	157/154M	1080	4125	3750	900	312	9.00	15
	9.00R20	16	144/142K	1019	2800	2650	900	299	7.0	17.5
	10.00R20	18	149/146K	1054	3250	3000	930	278	7.5	18.5
	11.00R20	20	153/150K	1085	3650	3350	930	293	8.0	16.5
	12.00R20	20	156/153K	1125	4000	3650	900	315	8.5	19.5
	12.00R24	20	160/157K	1228	4500	4125	900	315	8.5	24
	11R22.5	16	149/146K	1094	3250	3000	900	279	8.25	16
	10R22.5	16	144/141K	1124	3750	3450	930	320	9.75	18.5
	7.00R16LT	14	118/116L	775	1320	1180	770	200	6.00G	13
	7.50R16LT	16	125/121L	805	1650	1450	870	215	6.00G	14.5
	8.25R16LT	18	132/128L	855	2000	1800	870	235	6.50H	15

*This product cannot be used for lorries truck and buses.

GL66PLUS

Suitable for only semi-trailer for paved/ mixed roadof mid-short distance

Pattern	Size	PR	LI & SS	Overall Diameter (mm)	Load Capacity(kg) Single	Load Capacity(kg) Dual	Inflation Pressure (kpa)	Section Width (mm)	Standard Rim (inch)	Tread Depth (mm)
GL66PLUS	10.00R20	18	149/146K	1054	3150	3000	930	278	7.50	17.0
	11.00R20	20	153/150K	1085	3550	3350	930	293	8.00	16.0
	12.00R20	22	158/155K	1125	4250	3875	900	315	8.50	18.0
	12R22.5	18	152/149K	1085	3550	3250	930	300	9.00	18.0
	13R22.5	20	156/153K	1124	4000	3650	930	328	9.75	18.0

*This product cannot be used for lorries truck and buses.

GL65

Suitable for only semi-trailer for paved/ mixed roadof mid-short distance

Pattern	Size	PR	LI & SS	Overall Diameter (mm)	Load Capacity(kg) Single	Load Capacity(kg) Dual	Inflation Pressure (kpa)	Section Width (mm)	Standard Rim (inch)	Tread Depth (mm)
GL65	12.00R24	20	160/157K	1226	4500	4125	900	315	8.5	19.5

*This product cannot be used for lorries truck and buses.

GL61

Suitable for only semi-trailer for paved/ mixed roadof mid-short distance

Pattern	Size	PR	LI & SS	Overall Diameter (mm)	Load Capacity(kg) Single	Load Capacity(kg) Dual	Inflation Pressure (kpa)	Section Width (mm)	Standard Rim (inch)	Tread Depth (mm)
GL61	12R22.5	18	152/149L	1085	3550	3150	930	308	9.00	16.5

*This product cannot be used for lorries truck and buses.

GL62

Suitable for only semi-trailer for paved/ mixed roadof mid-short distance

Pattern	Size	PR	LI & SS	Overall Diameter (mm)	Load Capacity(kg) Single	Load Capacity(kg) Dual	Inflation Pressure (kpa)	Section Width (mm)	Standard Rim (inch)	Tread Depth (mm)
GL62	295/80R22.5	18	152/149M	1044	3550	3250	930	298	9.00	19

*This product cannot be used for lorries truck and buses.

GL88

Suitable for only semi-trailer for paved/ mixed roadof mid-short distance

Pattern	Size	PR	LI & SS	Overall Diameter (mm)	Load Capacity(kg) Single	Load Capacity(kg) Dual	Inflation Pressure (kpa)	Section Width (mm)	Standard Rim (inch)	Tread Depth (mm)
GL88	9.00R20	16	144/142K	1019	2800	2650	900	299	7.0	17.5
	10.00R20	18	149/146K	1054	3250	3000	930	278	7.5	18.5
	11.00R20	20	153/150K	1085	3650	3350	930	293	8.0	17.5
	12.00R20	20	156/153K	1125	4000	3650	900	315	8.5	19.5
	12R22.5	18	152/149K	1085	3550	3250	930	300	9.00	19
	13R22.5	18	154/151K	1124	3750	3450	830	320	9.75	20

*This product cannot be used for lorries truck and buses.

GL88PLUS

Suitable for only semi-trailer for paved/ mixed roadof mid-short distance

Pattern	Size	PR	LI & SS	Overall Diameter (mm)	Load Capacity(kg) Single	Load Capacity(kg) Dual	Inflation Pressure (kpa)	Section Width (mm)	Standard Rim (inch)	Tread Depth (mm)
GL88PULS	11.00R20	20	153/150K	1085	3650	3350	930	293	8.0	17.5
	12.00R20	22	158/155K	1125	4250	3875	900	315	8.50	21.5
	13R22.5	20	156/153K	1124	4000	3650	930	328	9.75	21.5

*This product cannot be used for lorries truck and buses.

GL95

Suitable for only semi-trailer for paved/mixed road of long-haul distance

Pattern	Size	PR	LI & SS	Overall Diameter (mm)	Load Capacity(kg) Single	Load Capacity(kg) Dual	Inflation Pressure (kpa)	Section Width (mm)	Standard Rim (inch)	Tread Depth (mm)
GL95	315/80R22.5	20	157/154M	1082	4125	3750	900	312	9.00	20

*This product cannot be used for lorries truck and buses.

GL917

Suitable for only semi-trailer for paved/ mixed roadof mid-short distance

Pattern	Size	PR	LI & SS	Overall Diameter (mm)	Load Capacity(kg) Single	Load Capacity(kg) Dual	Inflation Pressure (kpa)	Section Width (mm)	Standard Rim (inch)	Tread Depth (mm)
GL917	315/80R22.5	20	157D	1080	4125	3750	900	312	9.00	23

*This product cannot be used for lorries truck and buses.

GL937

Suitable for only semi-trailer for paved/ mixed roadof mid-short distance

Pattern	Size	PR	LI & SS	Overall Diameter (mm)	Load Capacity(kg) Single	Load Capacity(kg) Dual	Inflation Pressure (kpa)	Section Width (mm)	Standard Rim (inch)	Tread Depth (mm)
GL937	295/80R22.5	18	152/149K	1050	3550	3250	900	299	9.00	21

*This product cannot be used for lorries truck and buses.

GL95

Suitable for only semi-trailer for paved/ mixed roadof mid-short distance

Pattern	Size	PR	LI & SS	Overall Diameter (mm)	Load Capacity(kg) Single	Load Capacity(kg) Dual	Inflation Pressure (kpa)	Section Width (mm)	Standard Rim (inch)	Tread Depth (mm)
GL95	295/80R22.5	18	152/149K	1044	3550	3250	900	298	9.00	16.5

*This product cannot be used for lorries truck and buses.

GL75

Suitable for only semi-trailer for paved/ mixed roadof mid-short distance

Pattern	Size	PR	LI & SS	Overall Diameter (mm)	Load Capacity(kg) Single	Load Capacity(kg) Dual	Inflation Pressure (kpa)	Section Width (mm)	Standard Rim (inch)	Tread Depth (mm)
GL75	11R22.5	16	146/143M	1054	3800	2725	830	279	8.25	20
	11R22.5	18	149/146M	1054	3250	3000	930	279	8.25	20
	11R24.5	16	148/146L	1110	3250	3000	830	279	8.25	21
	11R24.5	18	152/149L	1110	3550	3250	900	279	8.25	21
	295/75R22.5	16	146/143L	1026	3000	2750	830	293	9.00	20
	295/75R22.5	18	148/145L	1026	3150	2900	900	293	9.00	20

*This product cannot be used for lorries truck and buses.

GL97

Suitable for only semi-trailer for paved/ mixed roadof mid-short distance

Pattern	Size	PR	LI & SS	Overall Diameter (mm)	Load Capacity(kg) Single	Load Capacity(kg) Dual	Inflation Pressure (kpa)	Section Width (mm)	Standard Rim (inch)	Tread Depth (mm)
GL97	225/80R17.5	14	129/127K	885	1850	1750	760	192	6.75	17.5
	235/75R17.5	16	132/129K	797	2000	1850	830	233	6.75	17.5
	12.00R24	20	160/157K	1226	4500	4125	900	316	8.5	24
	7.50R16LT	16	125/121K	805	1650	1450	870	215	6.00G	16.5
	8.25R16LT	18	132/128K	855	2000	1800	870	235	6.50H	16.5

*This product cannot be used for lorries truck and buses.

GL92

Suitable for only semi-trailer for paved/ mixed roadof mid-short distance

Pattern	Size	PR	LI & SS	Overall Diameter (mm)	Load Capacity(kg) Single	Load Capacity(kg) Dual	Inflation Pressure (kpa)	Section Width (mm)	Standard Rim (inch)	Tread Depth (mm)
GL92	12R22.5	18	152/149K	2085	3550	3250	930	300	9.00	23.5

*This product cannot be used for lorries truck and buses.

GL928

Suitable for only semi-trailer for paved/ mixed road of short distance

Pattern	Size	PR	LI & SS	Overall Diameter (mm)	Load Capacity(kg) Single	Load Capacity(kg) Dual	Inflation Pressure (kpa)	Section Width (mm)	Standard Rim (inch)	Tread Depth (mm)
GL928	12.00R24	24	167D	1235	4500	4125	980	250	8.5	24.0

*This product cannot be used for lorries truck and buses.

GL90

Suitable for only semi-trailer for paved/ mixed road of short distance

Pattern	Size	PR	LI & SS	Overall Diameter (mm)	Load Capacity(kg) Single	Load Capacity(kg) Dual	Inflation Pressure (kpa)	Section Width (mm)	Standard Rim (inch)	Tread Depth (mm)
GL90	11.00R20	18	152/149F	1096	3550	3250	930	293	8.0	24.0
	12.00R20	20	156/153F	1136	4000	3650	900	315	8.5	24.0
	12.00R20	22	158/155M	1136	4000	3650	900	315	8.5	24.0

*This product cannot be used for lorries truck and buses.

GL96

Suitable for only semi-trailer for paved/ mixed road of short distance

Pattern	Size	PR	LI & SS	Overall Diameter (mm)	Load Capacity(kg) Single	Load Capacity(kg) Dual	Inflation Pressure (kpa)	Section Width (mm)	Standard Rim (inch)	Tread Depth (mm)
GL96	11.00R20	20	150/150F	1096	3650	3350	930	293	8.0	25
	12.00R20	24	156/150M	1125	4250	3875	900	315	8.5	28

*This product cannot be used for lorries truck and buses.

GL99

Suitable for only semi-trailer for paved/ mixed road of short distance

Pattern	Size	PR	LI & SS	Overall Diameter (mm)	Load Capacity(kg) Single	Load Capacity(kg) Dual	Inflation Pressure (kpa)	Section Width (mm)	Standard Rim (inch)	Tread Depth (mm)
GL99	11.00R20	18	152/149F	1096	3550	3250	930	293	8.0	26.5
	12.00R20	20	156/153G	1136	4000	3650	900	315	8.5	27.0
	12.00R20	24	158/155G	1136	4250	3875	900	315	8.5	27.0

*This product cannot be used for lorries truck and buses.

GL98

Suitable for only semi-trailer for paved/ mixed road of short distance

Pattern	Size	PR	LI & SS	Overall Diameter (mm)	Load Capacity(kg) Single	Load Capacity(kg) Dual	Inflation Pressure (kpa)	Section Width (mm)	Standard Rim (inch)	Tread Depth (mm)
GL98	10.00R20	18	149/146F	1065	3250	3000	930	278	7.5	24
	11.00R20	20	153/150F	1096	3550	3250	930	293	8.0	24.5
	12.00R20	24	158/155B	1136	4250	3875	900	315	8.5	25
	13R22.5	18	152/149F	1096	3650	3350	930	300	9.0	24.0
	13R22.5	20	156/153F	1136	4000	3650	930	320	9.75	24

*This product cannot be used for lorries truck and buses.

GL930

Suitable for only semi-trailer for paved/ mixed road of short distance

Pattern	Size	PR	LI & SS	Overall Diameter (mm)	Load Capacity(kg) Single	Load Capacity(kg) Dual	Inflation Pressure (kpa)	Section Width (mm)	Standard Rim (inch)	Tread Depth (mm)
GL930	315/80R22.5	20	156/153K	1080	4000	3650	930	312	9.0	23
	315/80R22.5	22	160/157K	1087	4500	4125	970	312	9.0	23
	315/80R22.5	22	160/157F	1082	4500	4125	950	312	9.0	23
	315/80R22.5	22	160/157K	1082	4500	4125	950	312	9.0	23
	315/80R22.5	22	170/167D	1082	4500	4125	950	312	9.0	23

*This product cannot be used for lorries truck and buses.